


PRODUCT DESCRIPTION

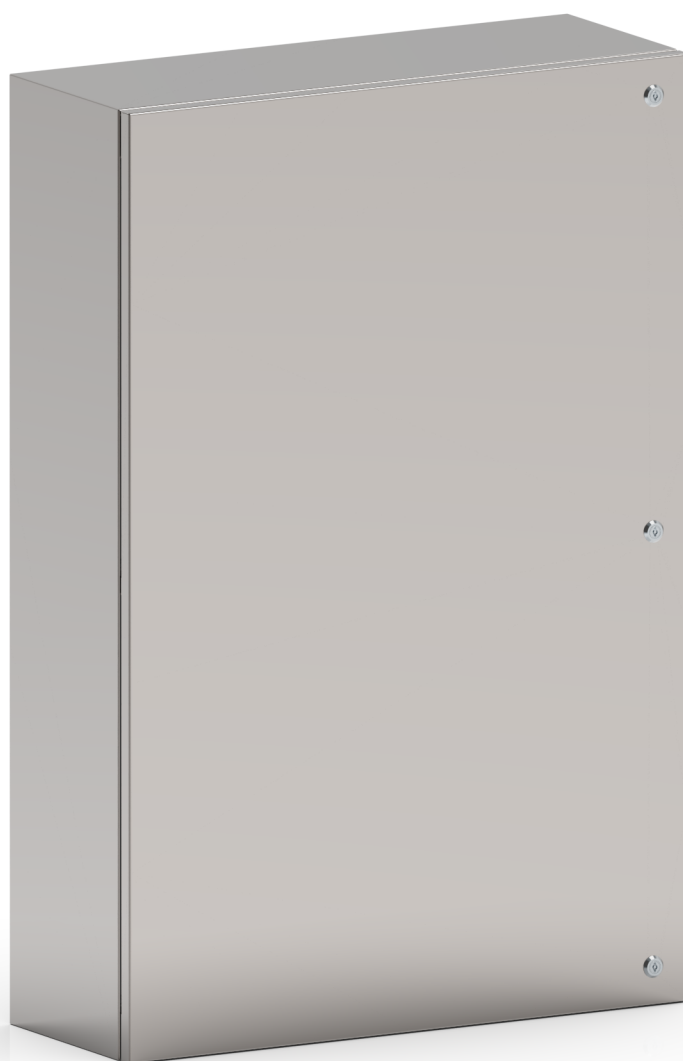

CCA06010030

ENCLOSURE WITH BLIND DOOR, 1 DOOR

*representative image

TECHNICAL CHARACTERISTICS

| | | |
|--|---|------|
| PRODUCT CODE | CCA06010030 | |
| DESCRIPTION | ENCLOSURE WITH BLIND DOOR, 1 DOOR W600 X H1000 X D300 | |
| MATERIAL | STAINLESS STEEL AISI 304 (1.4301) | |
| MATERIAL FINISHING | SCOTCH BRITE | |
| IP PROTECTION GRADE EN 60529 | IP66 | |
| IK RATING EN 62262 | IK10 | |
| NEMA RATING 250 | 4X | |
| UL/CSA UL508A CERTIFICATION, CSA C22.2 n° 14-13 | NEMA 1.12.4.4X | |
| DIMENSIONS | WIDTH mm | 600 |
| | HEIGHT mm | 1000 |
| | DEPTH mm | 300 |
| BODY | THICKNESS mm | 1.5 |
| | SINGLE-BODY CONSTRUCTION BENT AND CONTINUOUSLY WELDED | |
| DOOR | THICKNESS mm | 1.5 |
| | AIS I 304 STAINLESS STEEL CONCEALED HINGES, DOOR OPENING GREATER THAN 120° POLYURETHANE GASKET (RANGE TEMPERATURE: -40°C + 90°C) | |
| NUMBER OF DOORS | 1 | |
| NUMBER OF HINGES | 3 | |
| NUMBER OF LOCKS | 3 | |
| LOCK | CHROMED ZAMAK 3MM DOUBLE BIT LOCK | |
| NUMBER OF REAR FIXING | 6 | |
| FIXING INSERT | BLIND THREADED M6 | |
| REAR FIXING DISTANCE | WIDTH mm | 510 |
| | HEIGHT mm | 470 |
| SUPPLY KIT | INTERNAL PLATE FIXING SCREWS KIT AND DOUBLE FIN KEY | |
| | GROUNDING SCREW KIT | |
| PACKAGING | CARDBOARD | |
| WEIGHT (PLATE EXCLUDED) | Kg | 40.1 |
| VOLUME | m ² | 0.18 |

| | | |
|--------------------------------------|-----------------------|------------------|
| (OPTIONAL) INTERNAL PLATE | PLATE CODE | CPE060100 |
| | MATERIAL | GALVANIZED STEEL |
| | WIDTH mm | 547 |
| | HEIGHT mm | 970 |
| | ENCUMBRANCE mm | 14 |
| | THICKNESS mm | 2.5 |
| | WEIGHT Kg | 15.24 |

POWER DISSIPATION TABLES

POWER DISSIPATION



MAXIMUM DISSIPABLE POWER IN WATT (W) FOR ALLOWED OVERTEMPERATURE (T °) VALUES (EXTERNAL TEMP. + OVERTEMPERATURE = 60 ° C)

| | | | REAR RAGAINST WALL | | | |
|-----|------|-----|-----------------------------|-------|-------|-------|
| W | H | D | OVERTEMPERATURE VALUES (dT) | | | |
| | | | 25 °C | 30 °C | 35 °C | 40 °C |
| mm | mm | mm | W | W | W | W |
| 600 | 1000 | 300 | 195 | 234 | 273 | 312 |

POWER DISSIPATION



MAXIMUM DISSIPABLE POWER IN WATT (W) FOR ALLOWED OVERTEMPERATURE (T °) VALUES (EXTERNAL TEMP. + OVERTEMPERATURE = 60 ° C)

| | | | ALL SIDES FREE | | | |
|-----|------|-----|-----------------------------|-------|-------|-------|
| W | H | D | OVERTEMPERATURE VALUES (dT) | | | |
| | | | 25 °C | 30 °C | 35 °C | 40 °C |
| mm | mm | mm | W | W | W | W |
| 600 | 1000 | 300 | 153 | 184 | 214 | 245 |

download link CAD drawing: <https://www.compex.it/download/>